


PMW (>60 000 CFM)

PENTHOUSE MITERED CORNERS

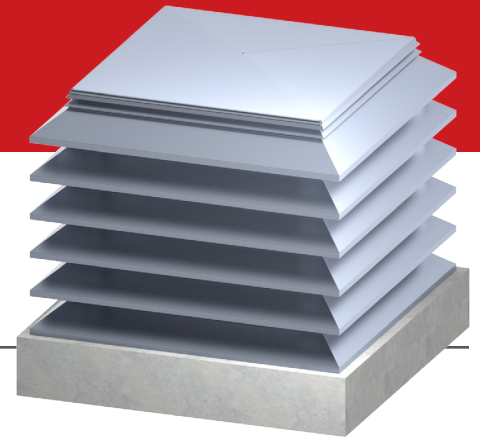

STANDARD CONSTRUCTION


BLADES	W-445
CORNERS	ANGLE OR FORMED ALUMINUM
ROOF	FORMED ALUMINUM 1/8" (3.2 MM)
ROOF SUPPORT	STRUCTURE SIZED ACCORDING TO PENTHOUSE DIMENSIONS
ROOF INSULATION	SELF-ADHESIVE MEMBRANE 3/16" (4.8 MM)
FINISH	MILL
DIMENSIONS	VARIABLES ACCORDING TO NEEDS. MODULAR CONSTRUCTION HELPS CIRCUMVENT SHIPPING AND WORKSITE CONSTRAINTS.

AVAILABLE OPTIONS




BLADES	W-245 / Z-245
	W-430 / Z-430
	Z-445
	W-445 1/8" (3.2 MM)
	W-645 / Z-645
CONFIGURATION	TWO SIDES
	THREE SIDES
CONSTRUCTION	MODULAR
STRUCTURE	SELF-SUPPORTING
ROOF	REMOVABLE, BOLTED
	REMOVABLE, MOUNTED ON HINGES
ACCESS PANEL	CONCEALED
DOOR	MOUNTED ON HINGES WITH PADLOCK HASP
	MOUNTED ON HINGES WITH MORTISE LOCK
BLANK-OFF PANELS	NON INSULATED
	INSULATED
FILTER SUPPORT	1" (25.4 MM)
	2" (50.8 MM)
INTERNAL DIVIDERS	NON INSULATED
	INSULATED
FLOOR	SCREEN
	INSULATED

FINISHES AVAILABLE

ANODIZED	CLEAR
	COLOR
PAINT	LECHLER ISOLACK (5-YEAR WARRANTY)
	DURANAR OR INTERPON D 2000 (20-YEAR WARRANTY)
	DURANAR XL OR INTERPON D 3000 (30-YEAR WARRANTY)

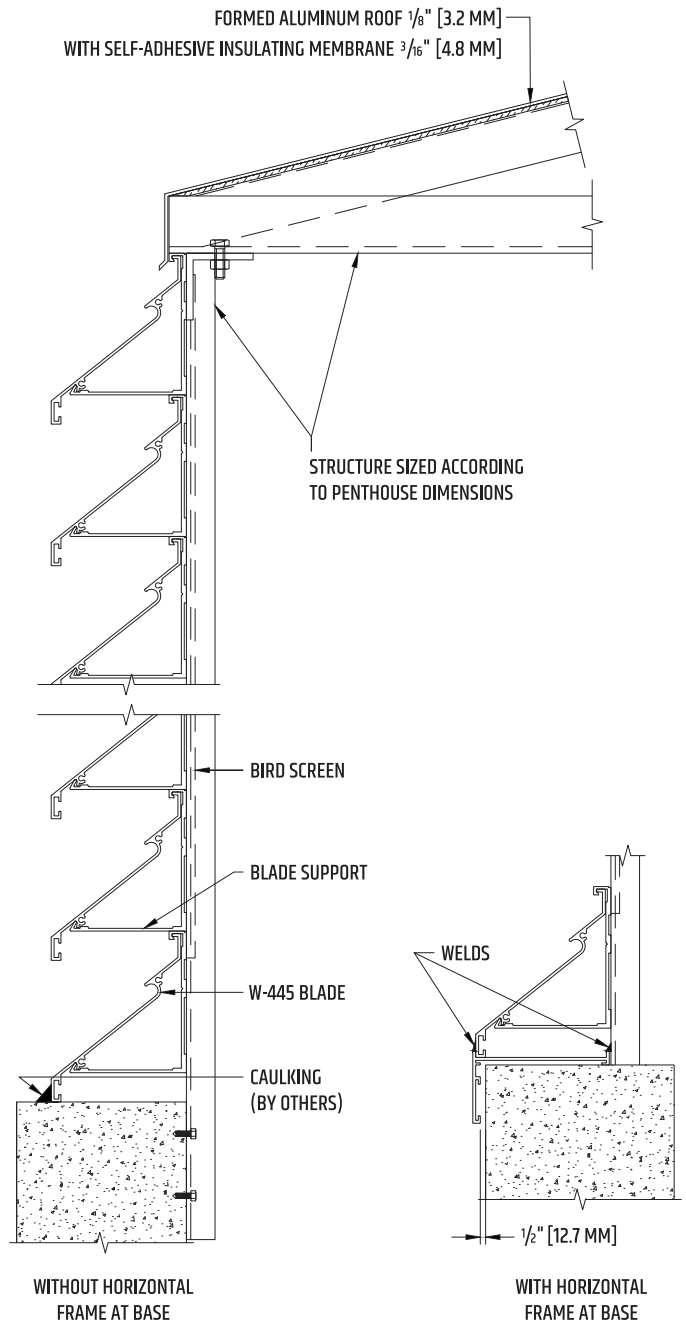




PMW (>60 000 CFM)

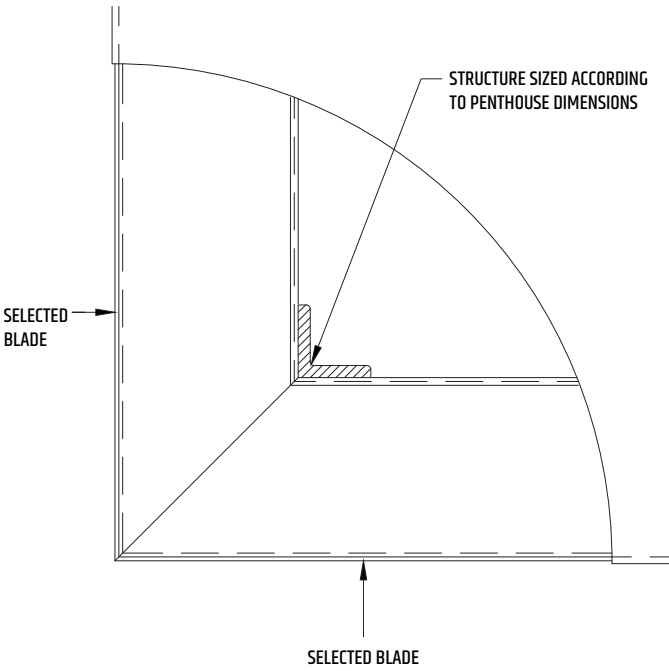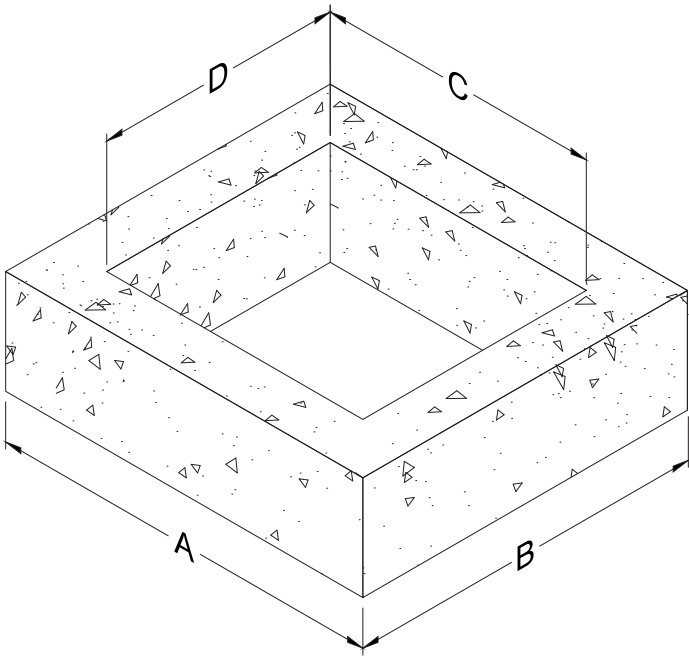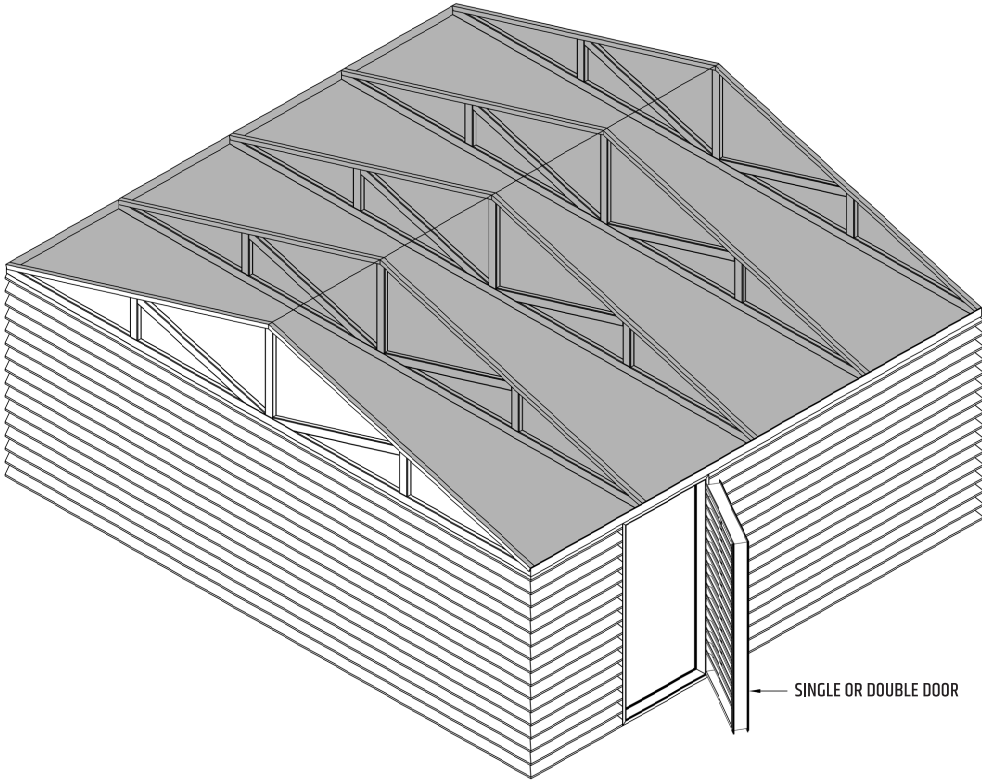

NOTE: Dimensions A, B, C and D need to be specified when ordering. Trolec will determine the necessary assembly clearances.

PMW (>60 000 CFM)

ROOF SHIPPED IN MULTIPLE SECTIONS

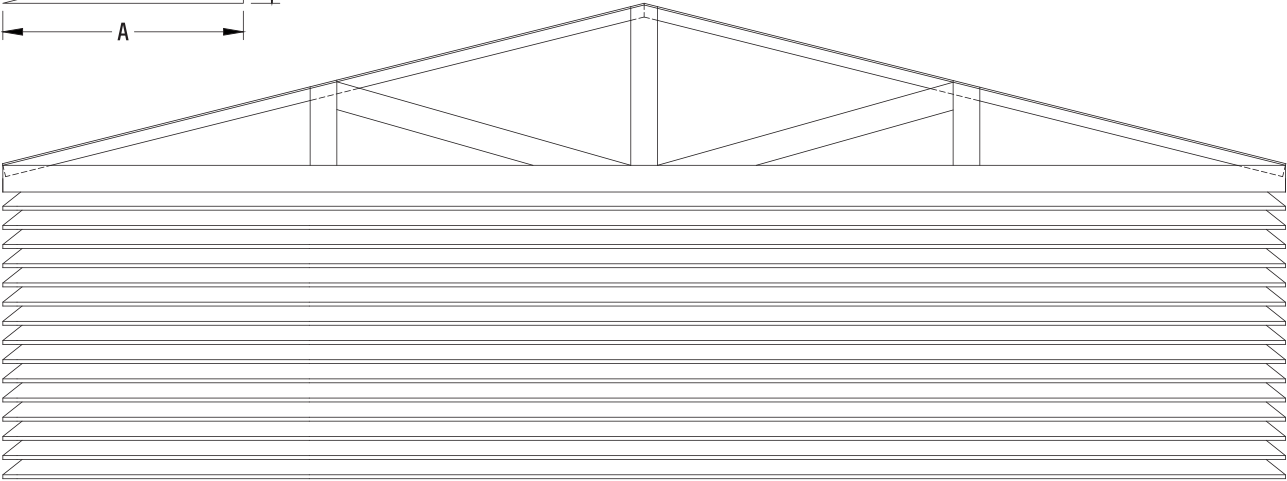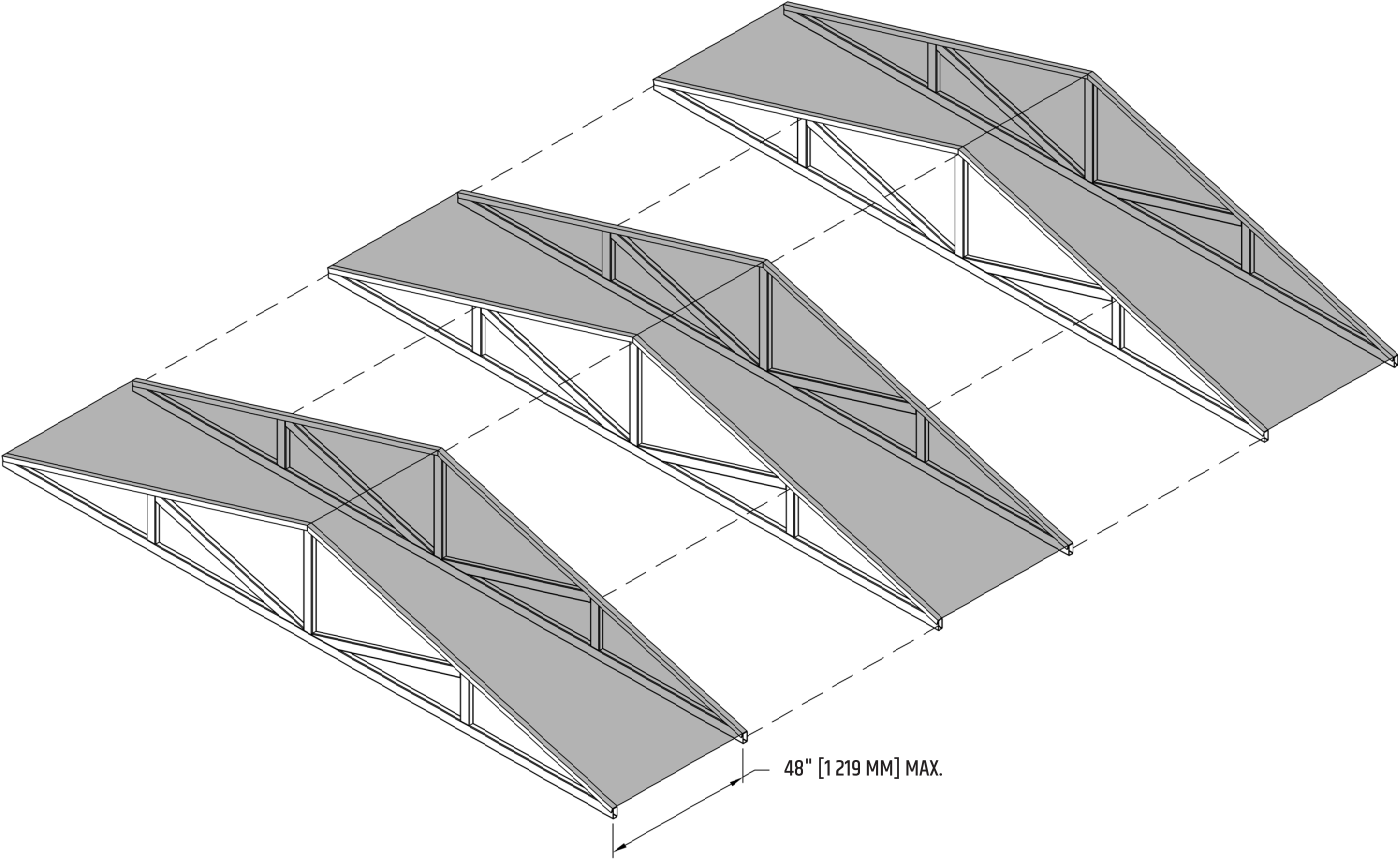

Trolec reserves the right to modify these specifications without notice.