

V18R

ROUND DAMPERS





STANDARD CONSTRUCTION

FRAME	20 GA GALVANIZED STEEL
BLADE	16 GA GALVANIZED STEEL
BUSHING	DELRI ^N (POLYMER)
AXLE	STEEL Ø 1/2" (12.7 MM)
STOPPERS	SELF-ADHESIVE NEOPRENE (ACRYLIC GLUE) 3/8" X 5/8" (9.5 MM X 16 MM)
ACTUATOR MOUNTING PLATE	20 GA GALVANIZED STEEL, 14" (355.6 MM) LONG

AVAILABLE OPTIONS

FRAME	16 GA STEEL
	18 GA STEEL
ACTUATOR	BELIMO
MANUAL QUADRANT	DYN AIR QC-50R / DURO DYNE K-8
FINISH	LECHLER ISOLACK PAINT (5-YEAR WARRANTY)
INSULATION	ARMAFLEX 3/16" (4.8 MM) (ACRYLIC GLUE) - INT./EXT. BLADE
BUSHING	BRONZE

TYPE	A DIAMETER (S/E)	B LENGTH	C
V18R	4" (101.6 MM)	18" (457.2 MM)	15" (38.1 MM)
	5" (127 MM)		
	6" (152.4 MM)		
	7" (177.8 MM)		
	8" (203.2 MM)		
	9" (228.6 MM)		
	10" (254 MM)		
	12" (304.8 MM)		
	14" (355.6 MM)		
	16" (406.4 MM)		

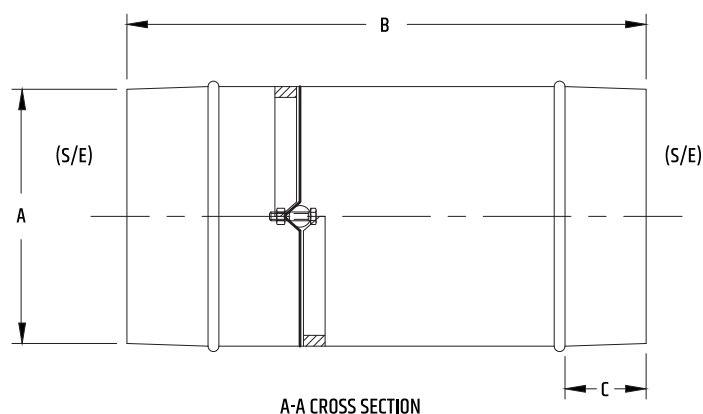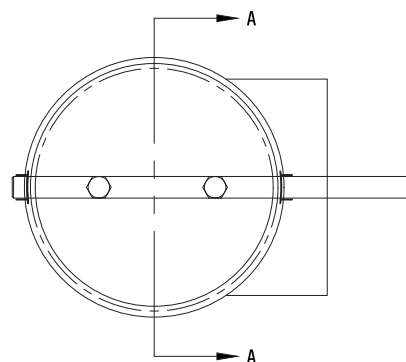

A-A CROSS SECTION

TROLEC DAMPER MAINTENANCE

When dampers are exposed to harsh worksite elements such as cement dust, it is sometimes necessary to lubricate the moving parts for maximum performance.

We recommend a penetrating lubricant such as Aerochem's MX-EP, which we use during the assembly process.

Trolec products are always carefully inspected before shipping. However, appropriate measures should be taken in the field to ensure maximum performance.

Trolec may not be held liable for any damage resulting from misuse of its products or inadequate installation.

Trolec reserves the right to modify these specifications without notice.