



SUBMITTAL DRAWING A M I - 75 A STATIC FIRE DAMPERS

STANDARD CONSTRUCTION

MAXIMUM SIZE

Single section, Vertical 60" x 60"
Horizontal 34"x60"

MINIMUM SIZE

4" x 4" - Vertical and Horizontal

FRAME


22 ga. Rollformed Steel frame

FINISH - Mill

TYPE A

Horizontal & Vertical

U.L Classified
1-1/2 Hour Rating

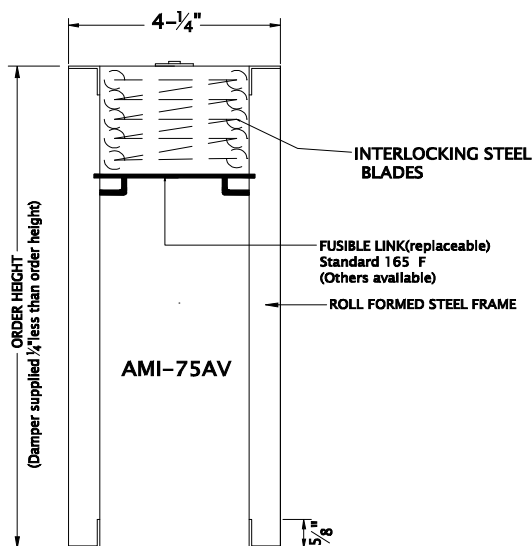

(V) VERTICAL MOUNT



UNDERWRITERS LABORATORIES (UL555)
CLASSIFIED FIRE DAMPERS
FIRE RESISTANCE RATED 1.5 HOURS.
FOR USE IN UL CLASSIFIED BUILDING
MATERIALS RATED 2 HOURS OR LESS.

BLADES



22 ga. Interlocking Steel Blades
'In Air Stream'

MULTIPLE SECTIONS ASSEMBLY

Vertical - 120" x 120" -
Horizontal - 102 "x 60"

OPTIONS:

- ☐ Vertical Mount
- ☐ Horizontal Mount
- ☐ 165 deg. F. Fusible Link (Standard)
- ☐ 212 deg. F. Fusible Link
- ☐ 304 Stainless Steel Construction

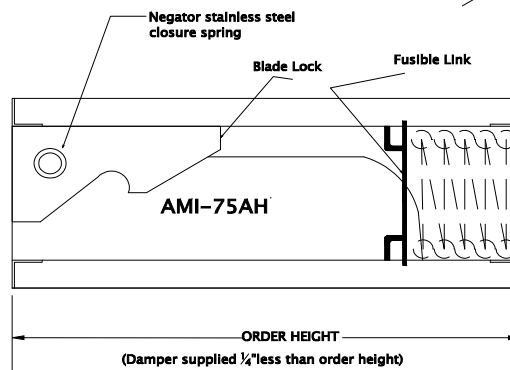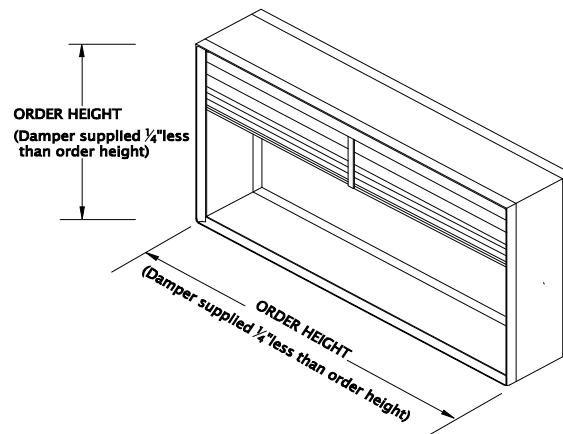

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING MODEL INCLUDES STAINLESS STEEL
NEGATOR SPRINGS AND BLADE LOCKS

Project:
Location:
Architect
Engineer:

Contractor:
Address:
P.O. Number:
Date: