


V90-SBR-SS

ROUND DAMPERS HIGH PRESSURE

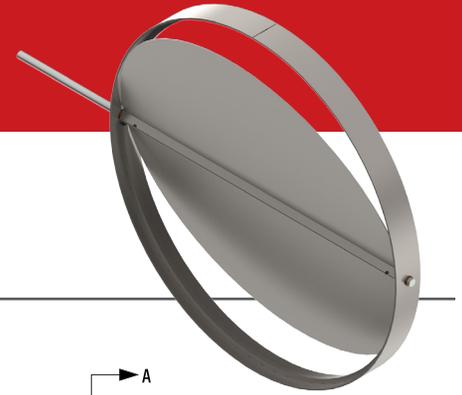



STANDARD CONSTRUCTION

FRAME	STAINLESS STEEL 316-2B, 2" X 1/8" (50.8 MM X 3.2 MM)
BLADE	STAINLESS STEEL 316-2B, 16 GA
BUSHING	STAINLESS STEEL
AXLE	STAINLESS STEEL Ø 1/2" (12.7 MM)
STOPPERS	STAINLESS STEEL 5/16" X 5/16" (8 MM X 8 MM) (H.R.S.)
SEAL	SELF-ADHESIVE NEOPRENE (ACRYLIC GLUE) 95 °C (200 °F)

AVAILABLE OPTIONS

INSULATION	ARMAFLEX 3/16" (4.8 MM) (ACRYLIC GLUE) - INT./EXT. BLADE
FRAME	4" THICK (101.6 MM)
FLANGES	1" FLANGES (25.4 MM)

TYPE	A	B
V90-SBR-SS	2" (50.8 MM)	1/8" (3.2 MM)

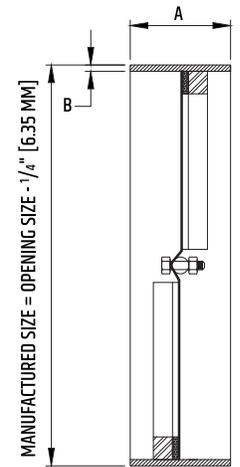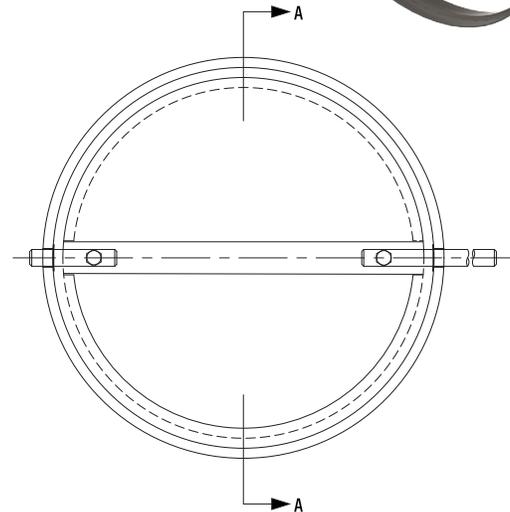

A-A CROSS SECTION

TROLEC DAMPER MAINTENANCE

When dampers are exposed to harsh worksite elements such as cement dust, it is sometimes necessary to lubricate the moving parts for maximum performance.

We recommend a penetrating lubricant such as Aerochem's MX-EP, which we use during the assembly process.

Trolec products are always carefully inspected before shipping. However, appropriate measures should be taken in the field to ensure maximum performance.

Trolec may not be held liable for any damage resulting from misuse of its products or inadequate installation.

Trolec reserves the right to modify these specifications without notice.