


PW (>60 000 CFM)

PENTHOUSE CLOSED CORNERS

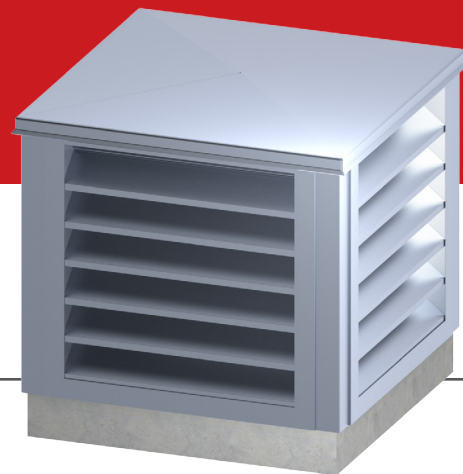

STANDARD CONSTRUCTION

LOUVERS	W-645
CORNERS	SQUARE TUBING
ROOF	FORMED ALUMINUM 1/8" (3.2 MM)
ROOF SUPPORT	STRUCTURE SIZED ACCORDING TO PENTHOUSE DIMENSIONS
ROOF INSULATION	SELF-ADHESIVE MEMBRANE 3/16" (4.8 MM)
FINISH	MILL
DIMENSIONS	VARIES ACCORDING TO NEEDS. MODULAR CONSTRUCTION HELPS CIRCUMVENT SHIPPING AND WORKSITE CONSTRAINTS.


AVAILABLE OPTIONS

LOUVERS	W-430 / Z-430
	W-445 / Z-445
	W-445 1/8" (3.2 MM)
	Z-645
	D-445
	(T)WGW-646
CONFIGURATION	TWO SIDES
	THREE SIDES
CONSTRUCTION	MODULAR
STRUCTURE	SELF-SUPPORTING
ROOF	REMOVABLE, BOLTED
	REMOVABLE, MOUNTED ON HINGES
ACCESS PANEL	CONCEALED
DOOR	MOUNTED ON HINGES WITH PADLOCK HASP
	MOUNTED ON HINGES WITH MORTISE LOCK
BLANK-OFF PANELS	NON INSULATED
	INSULATED
FILTER SUPPORT	1" (25.4 MM)
	2" (50.8 MM)
INTERNAL DIVIDERS	NON INSULATED
	INSULATED
FLOOR	SCREEN
	INSULATED




FINISHES AVAILABLE

ANODIZED	CLEAR
	COLOR
PAINT	LECHLER ISOLACK (5-YEAR WARRANTY)
	DURANAR OR INTERPON D 2000 (20-YEAR WARRANTY)
	DURANAR XL OR INTERPON D 3000 (30-YEAR WARRANTY)

FORMED ALUMINUM ROOF 1/8" [3.2 MM]
WITH SELF-ADHESIVE INSULATING MEMBRANE 3/16" [4.8 MM]

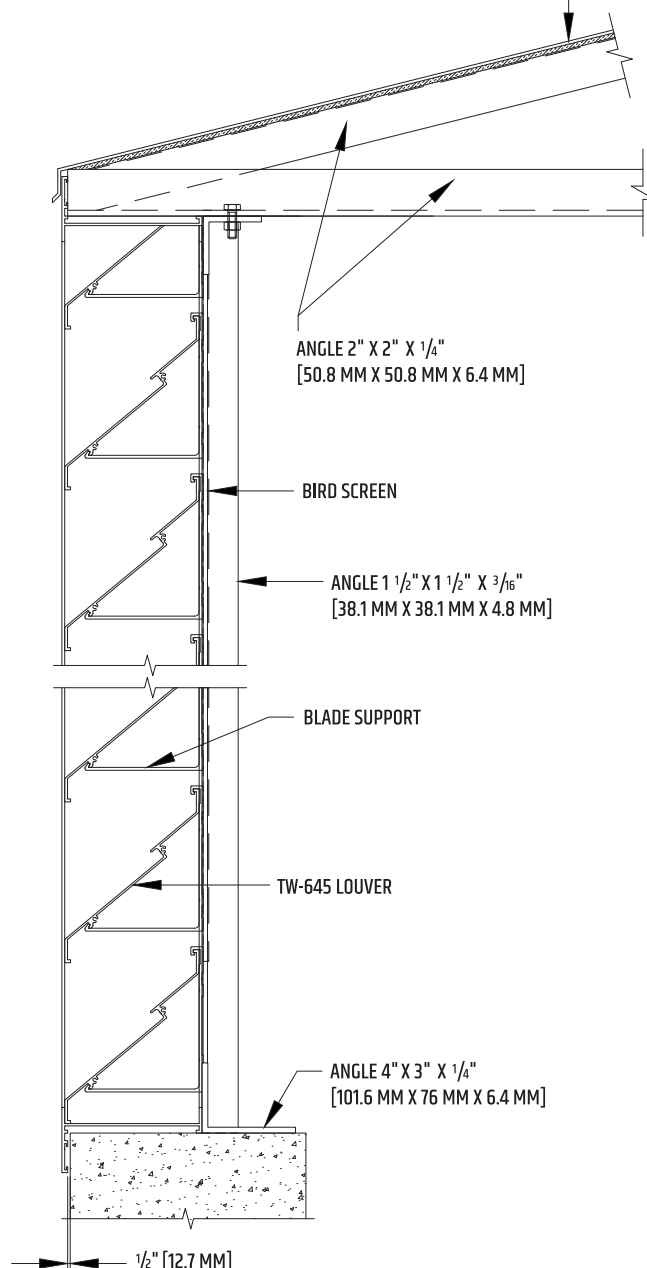




PW (>60 000 CFM)

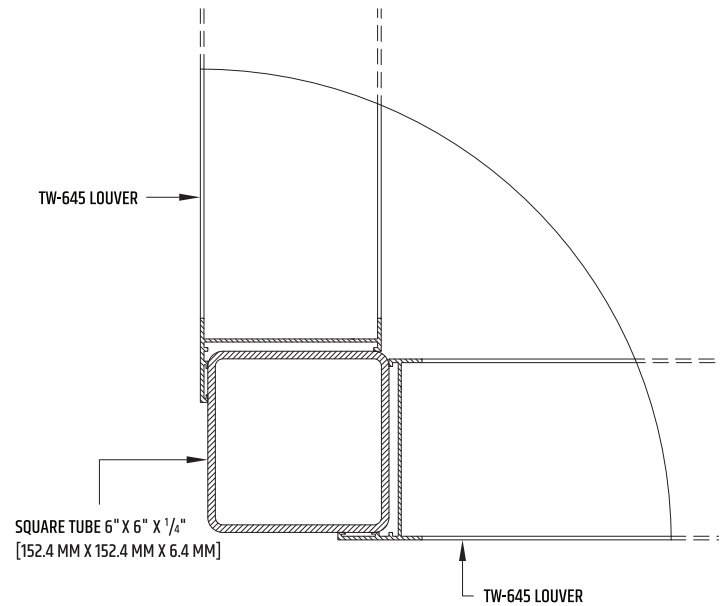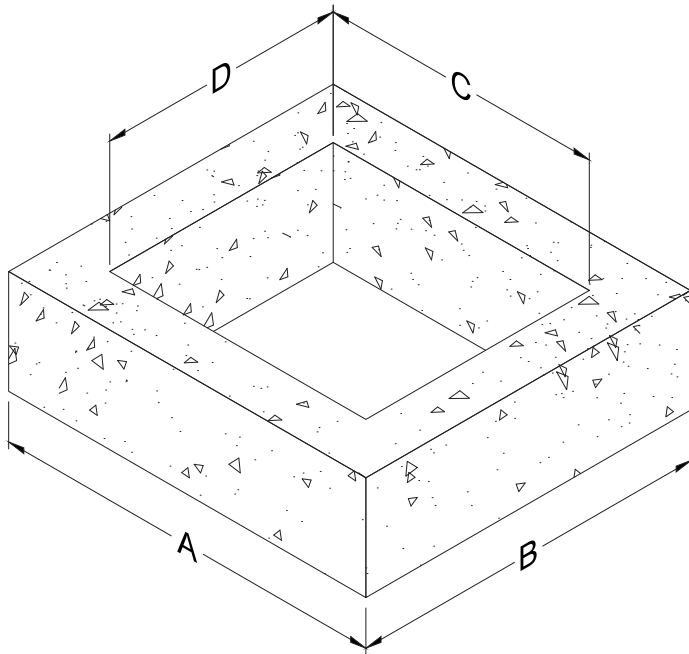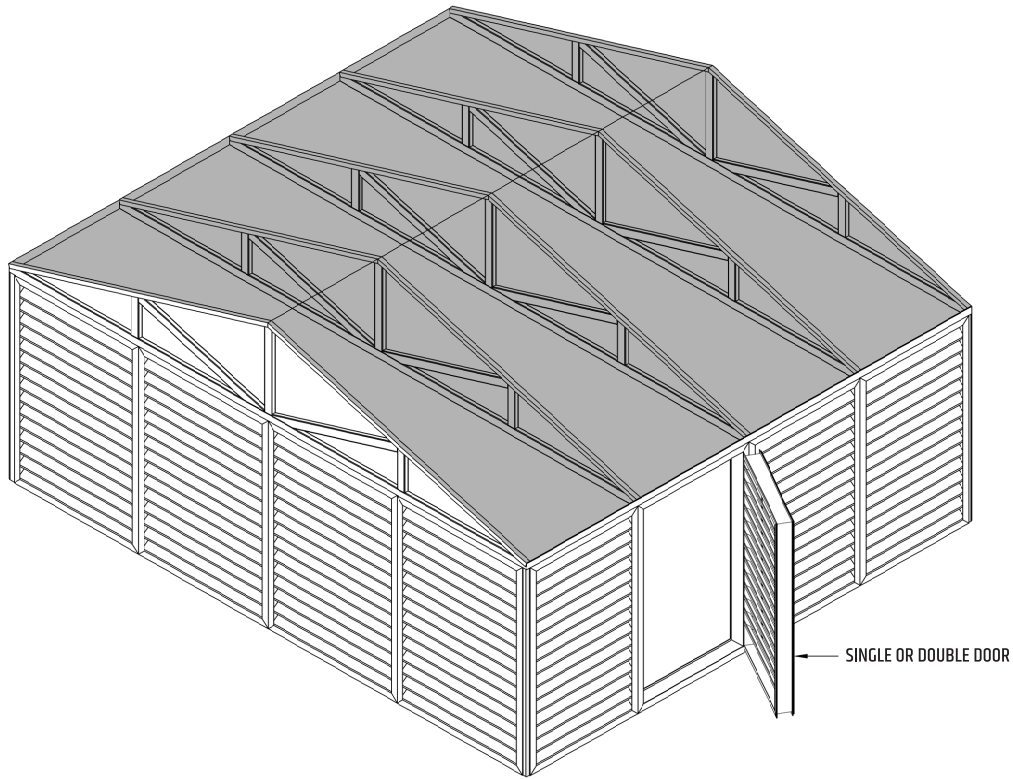

NOTE: Dimensions A, B, C and D need to be specified when ordering.
Trolec will determine the necessary assembly clearances.

PW (>60 000 CFM)

ROOF SHIPPED IN MULTIPLE SECTIONS

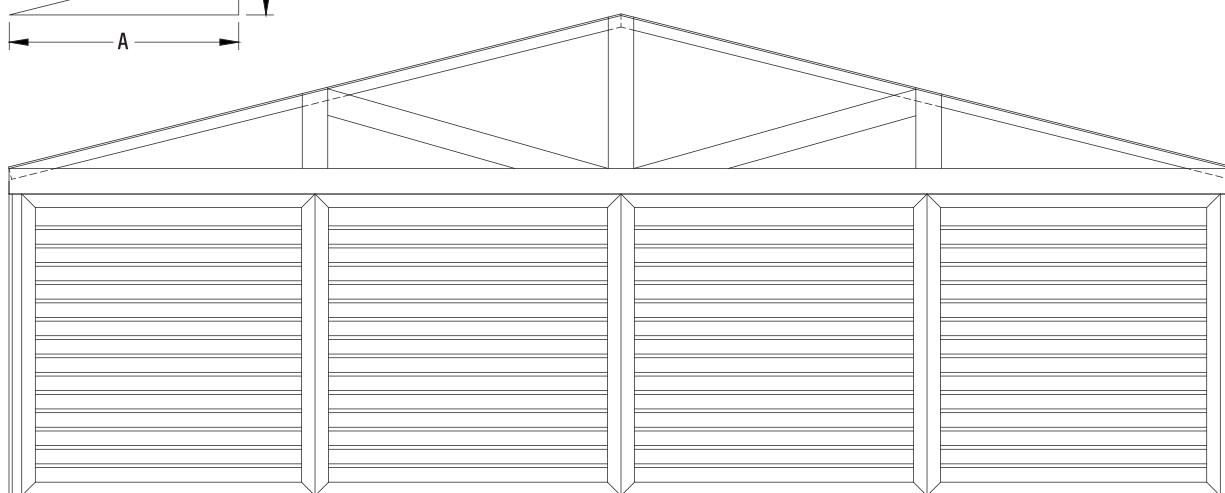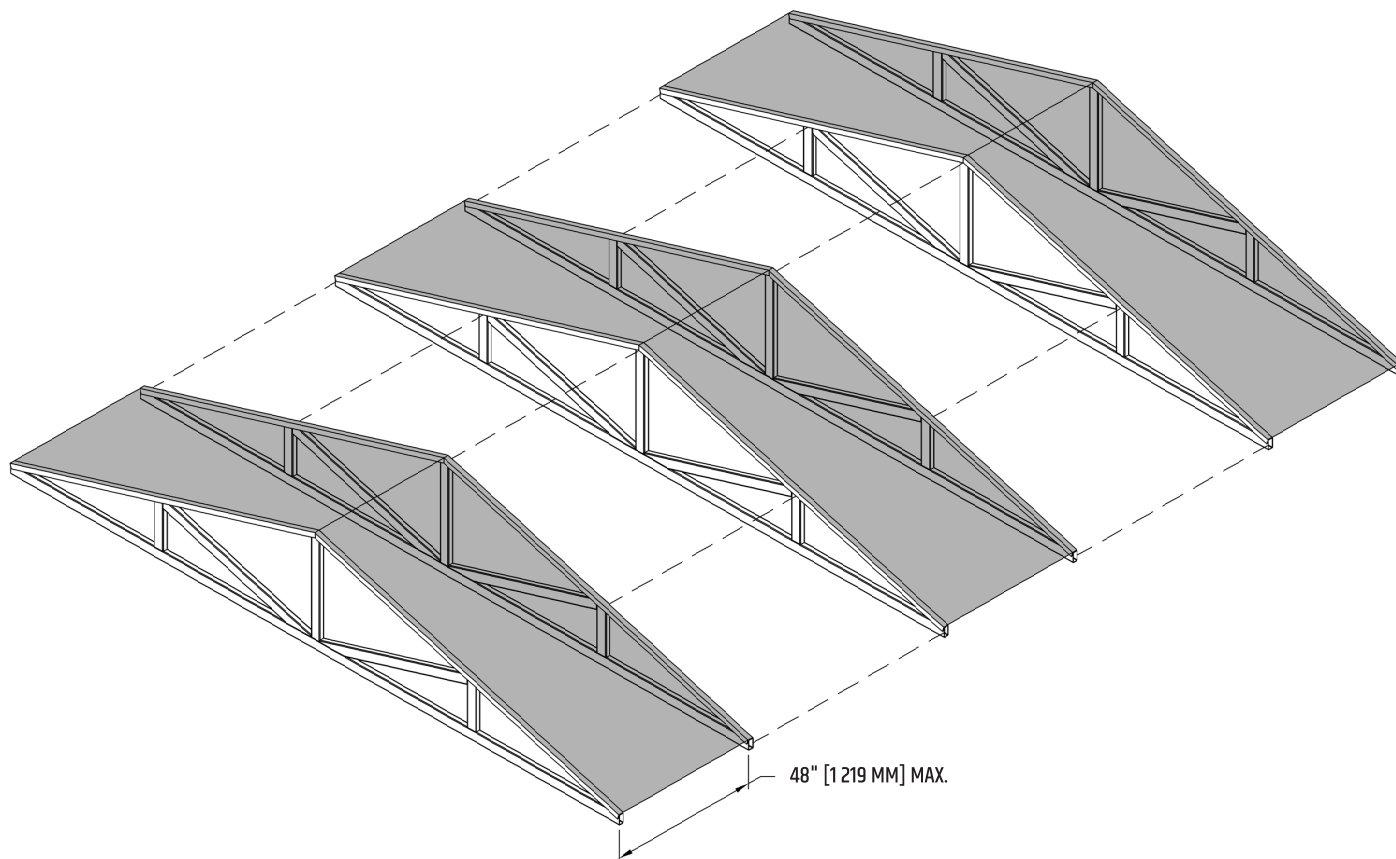

Trolec reserves the right to modify these specifications without notice.

trolec
DAMPERS & LOUVERS

**MAKING
MASTERWORKS**

OCTOBER 2016

4700 Thibault Ave, Saint-Hubert (Quebec) J3Y 0A8 // ventes@trolec.com // trolec.com
T. 1.888.656.2610 450.656.2610 // F. 1.888.305.1912 514.525.1912