



SUBMITTAL DRAWING
AMI - 55 CRD
CEILING RADIATION DAMPERS (ROUND)

STANDARD CONSTRUCTION

FRAME

22 ga. Rollformed galvanized steel

BLADES

22 ga. Galvanized steel

FUSIBLE LINKS

165 deg, Standard

FINISH

Mill

MAXIMUM SIZE

24" Diameter


MINIMUM SIZE

4" dia

Note:

1. Ceramic Insulation is not UL required on Dampers with areas less than 80 sq. in. and is optional. Dampers above 80 sq. in. will be provided with Blade Insulation.

U.L.Classified
1 1/2 Hour Rating

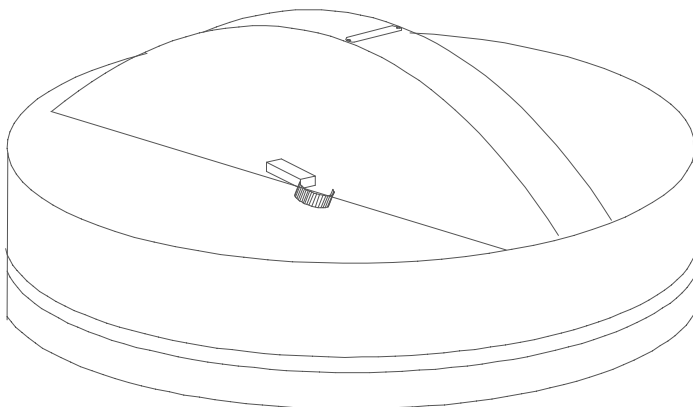

UNDERWRITERS LABORATORIES (UL555)
CLASSIFIED FIRE DAMPERS
FIRE RESISTANCE RATED 3 HOURS.
FOR USE IN UL CLASSIFIED BUILDING
MATERIALS RATED 4 HOURS OR LESS.

Project:
Location:
Architect
Engineer:

Contractor:
Address:
P.O. Number:
Date:
